



## P1/PD 28CC through drive released

PA-0003

HPD is pleased to announce that the P1/PD 28CC pumps are now available with through drives.

### *Your inside info at HPD*

**CONTACT:**

Pat Larkin  
New Business  
Development  
Manager

269-694-2581  
plarkin@parker.com

The through drive capability can reduce the installation expense in a system by eliminating the need for a double shaft electric motor or an additional mounting pad for mobile applications.

The P1/PD 28cc can be delivered with either a 2 bolt SAE A or SAE B mount with the SAE A 9 tooth or 11 tooth coupling or the SAE B 13 tooth coupling. The through drives have a double 2 bolt mount with a horizontal and an angled orientation so that a variety of pumps could be mounted to the unit. A unique feature of the angled mount is that you can mount an additional P1/PD 18cc or 28cc pump onto the back and have the suction and pressure ports on the same plane which makes plumbing much simpler.

Below are the thru-drive ordering code options for the P1/PD 028

P\*028\*\*\*\*\*T00**A**\*\*\*\*

**A** = SAE A 2 Bolt mount with 9 tooth coupling

P\*028\*\*\*\*\*T00**H**\*\*\*\*


**H** = SAE A 2 Bolt mount with 11 tooth coupling

P\*028\*\*\*\*\*T00**B**\*\*\*\*


**B** = SAE B 2 Bolt mount with 13 tooth coupling

All P1/PD models 28cc through 140cc are available with through drives, using the same list price adders.

P1/PD 28cc through drive unit

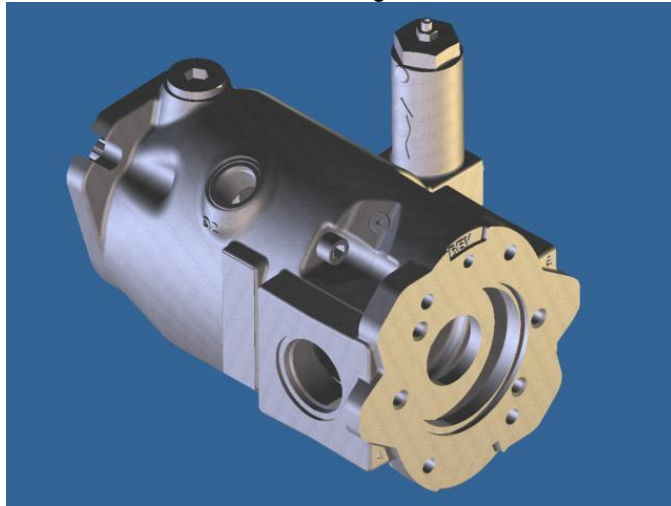

P1/PD 28cc through drive unit

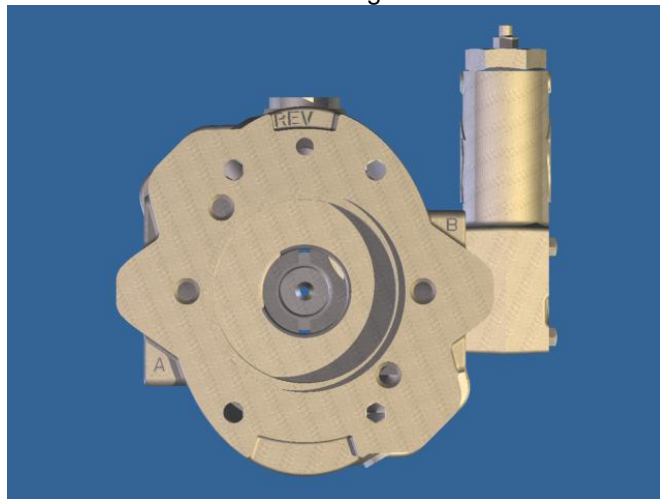

PD 18 mounted to PD 28 through drive unit



For assistance selecting a through drive pump contact a HPD technical expert  
@ 937-644-3915 or email [pumptechsupport@parker.com](mailto:pumptechsupport@parker.com).